





**MONTERINGSANVISNING · INSTALLATION INSTRUCTIONS
MONTAGEANLEITUNG · INSTRUCTIONS DE MONTAGE**

Saab 9-3 M03-
Cruise Control

Accessories Part No.	Group	Date	Instruction Part No.	Replaces
12 787 315	9:36-19	May 02	12 799 591	

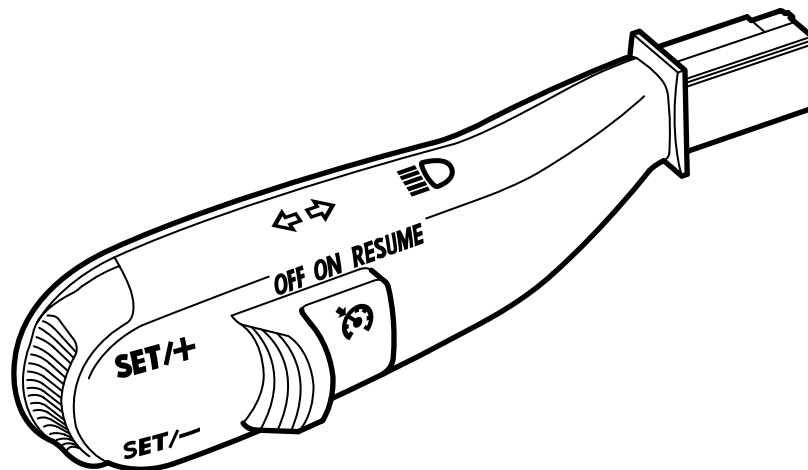

F980A018

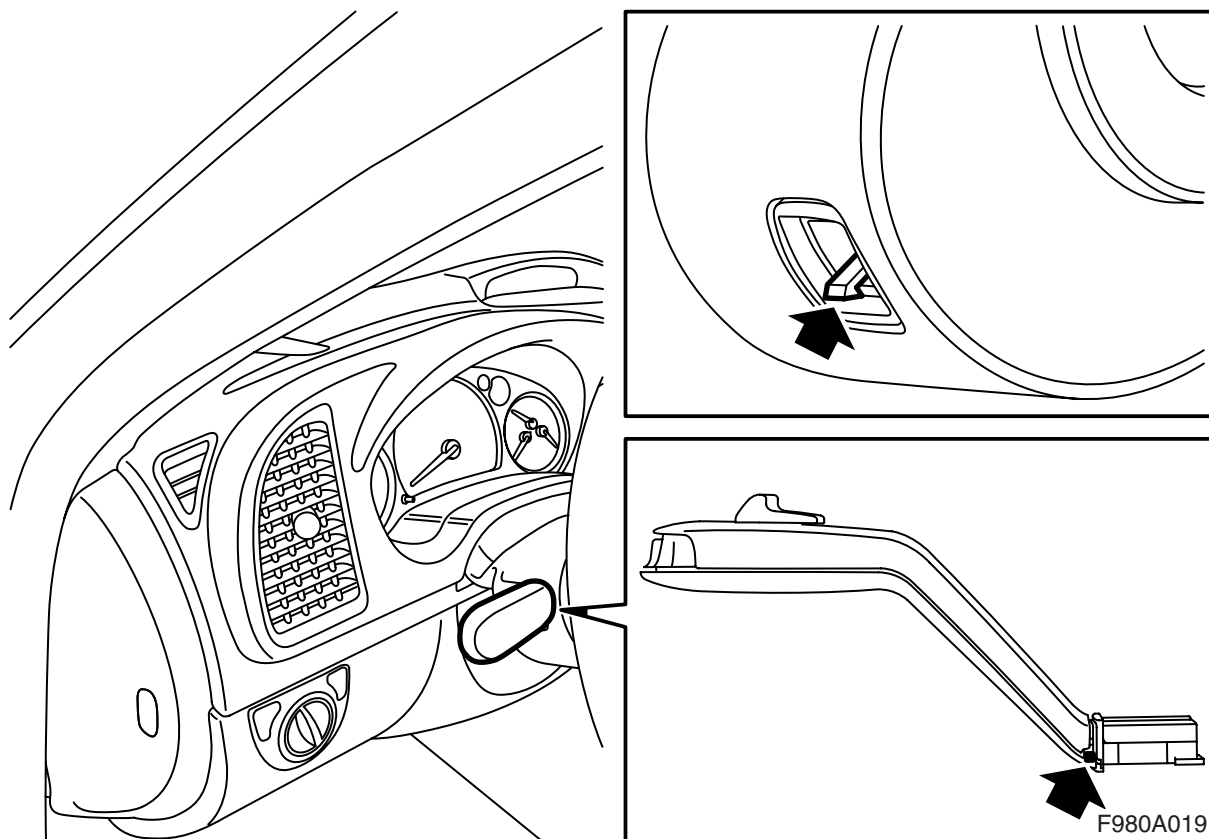

- 1 Find the hole on the bottom of the turn signal stalk. Insert a small screwdriver into the hole, press the internal catch upwards while pulling the turn signal stalk outwards.
- 2 Insert the new turn signal stalk and press it inwards until the catch audibly engages with a click.
- 3 Connect the diagnostic tool, select car and model year, select "All", select "Add/Remove", select the accessory and then "Add".
- 4 Test drive the car and check the function of the cruise control as follows:
 - Move the slide control to the ON position.
 - Move the control to position SET/+ or SET/- when the car maintains a speed over 40 km/h (car with petrol engine) or 25 km/h (car with diesel engine) and check that speed is maintained.
 - Accelerate without downshifting (car with manual gearbox). When the accelerator pedal is released, the car should resume the set speed.
 - Move the control to position SET/+, hold it in this position and check to see if speed increases. Release the control.
 - Depress the brake pedal and check to see if cruise control disengages.