




MONTERINGSANVISNING · INSTALLATION INSTRUCTIONS  
MONTAGEANLEITUNG · INSTRUCTIONS DE MONTAGE

## Saab 900, Saab 9000, Saab 9-3, Saab 9-5


Bike carrier

Accessories Part No.	Group	Date	Instruction Part No.	Replaces
12 798 668 400 107 793	9:89-17	Jun 02	12 798 670 (86 88 269)	86 88 269 Jun 97

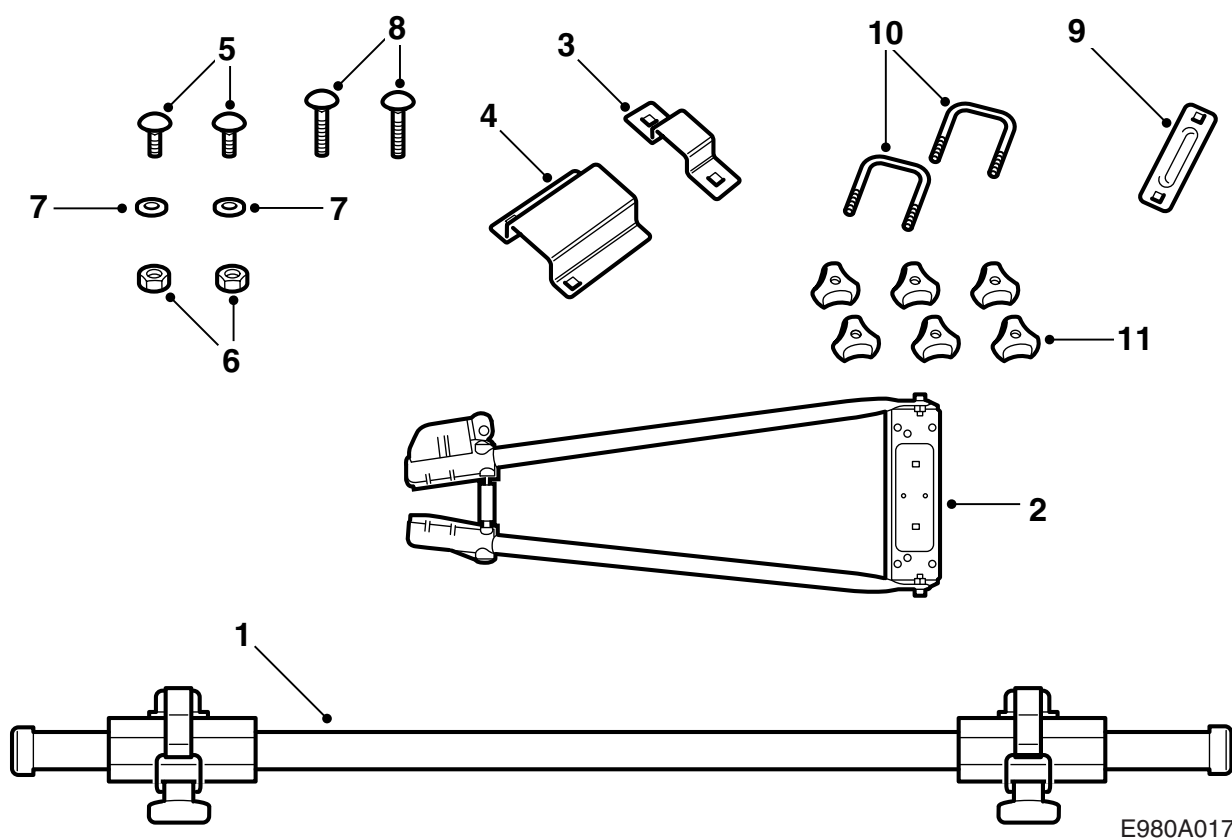

E980A017


- 1 Square bars with wheel plates
- 2 Bracket
- 3 Mounting, front
- 4 Mounting, rear
- 5 Screw (x2)
- 6 Nut (x2)
- 7 Washer (x2)
- 8 Screw (x2)
- 9 Lower mounting plate, rear
- 10 U-bolt (x2)
- 11 Hand nuts

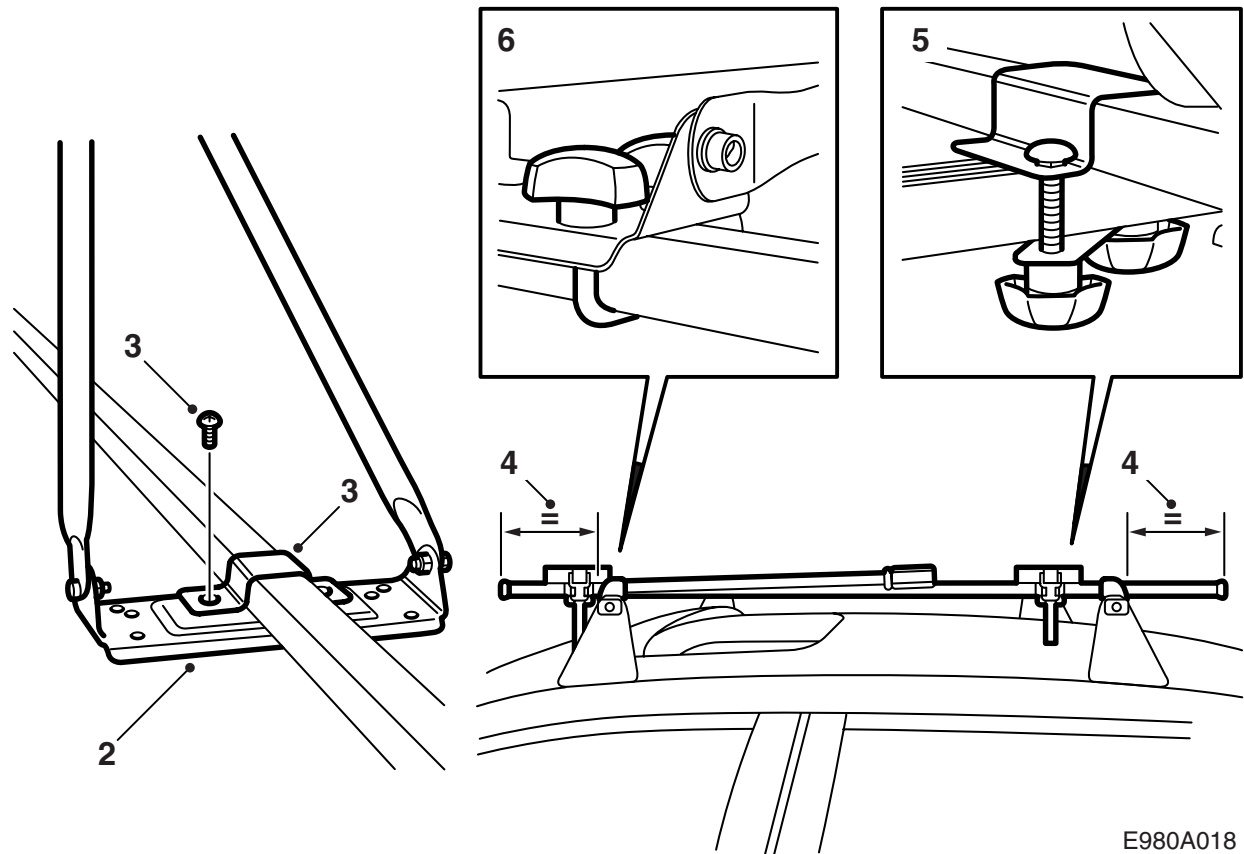

E980A018

### Fitting the bike carrier

- 1 Adjust the wheel plates on the square bar to fit the bicycle.
- 2 Insert the square bar in the bracket so that the mounting plate is on the underside of the square bar.
- 3 Attach the bracket to the square bar with screws.
- 4 Lift up the bike carrier onto the roof racks. Adjust the square bar so that the overhang is equal for both roof racks.
- 5 Fit the rear mounting over the square bar and fit the mounting plate underneath. Use the hand nuts and screws to secure the mounting to the roof rack.
- 6 Use the U-bolts and hand nuts to secure the front mounting to the roof rack.

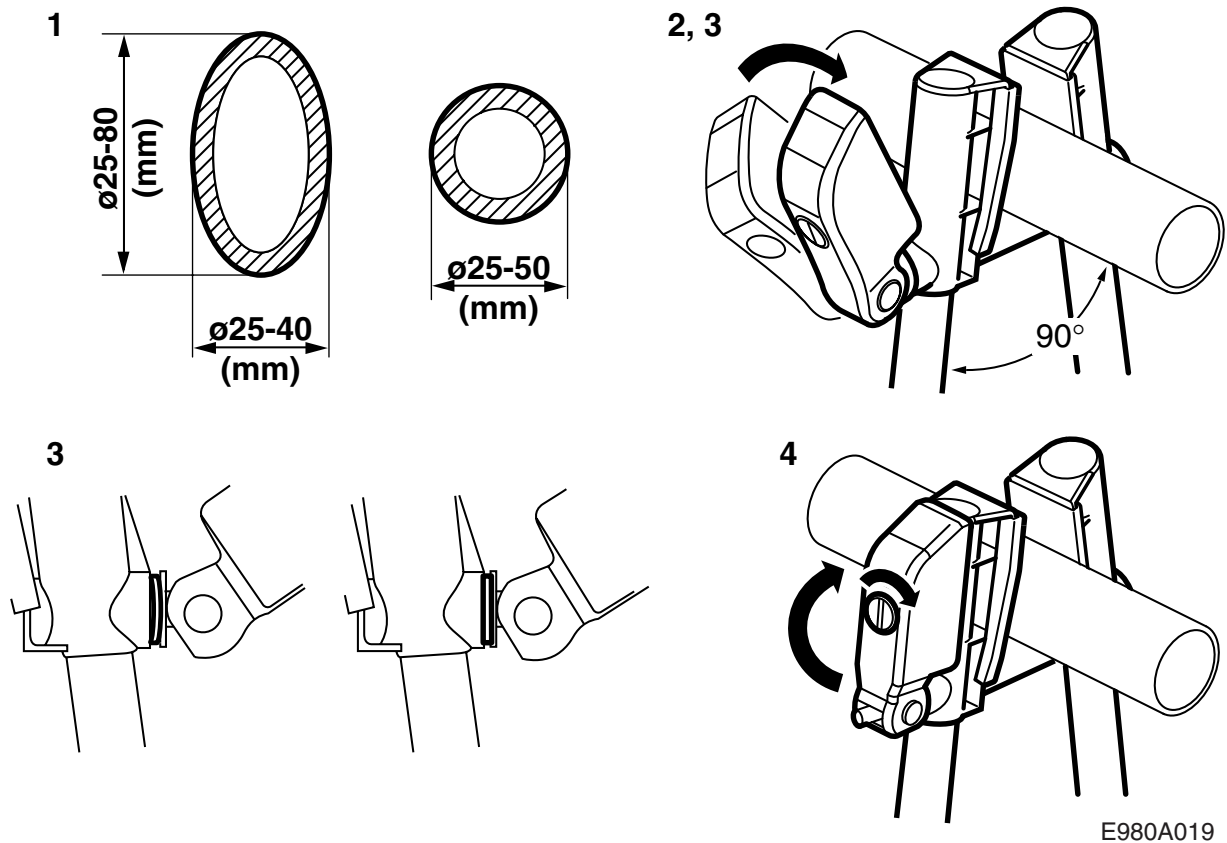



### Mounting the bike in the bike carrier

- 1 Open the bracket holder in order to fit the bike frame. Appropriate bike frames  $\varnothing 25-50$  mm and oval frames  $b = \varnothing 25-40$  mm  $h = \varnothing 25-80$  mm
- 2 Raise the bracket and place the bike frame in the bracket.


#### Note

Check that there is a  $90^\circ$  angle between the bike frame and the bracket.

- 3 Tighten the bike frame with the handle. Tighten until the washer flattens.
- 4 Raise and lock the handle by turning the screw to a horizontal position.

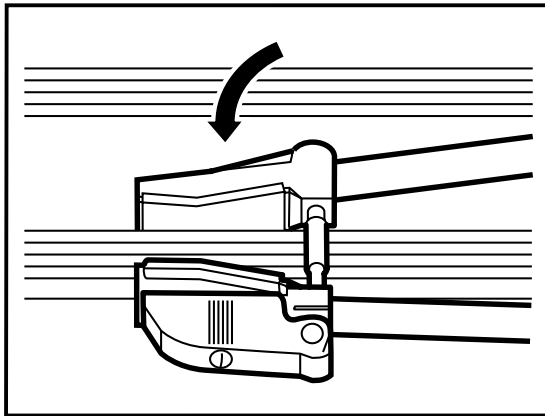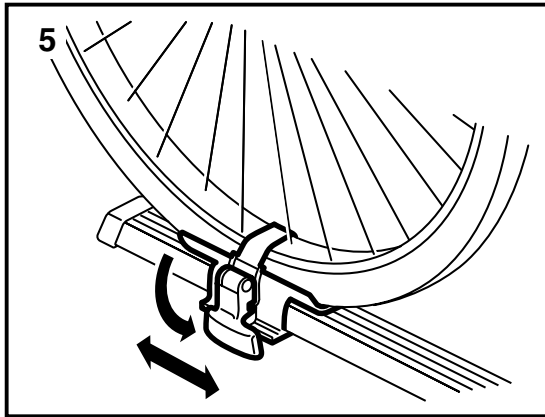

Max **120** Km/h

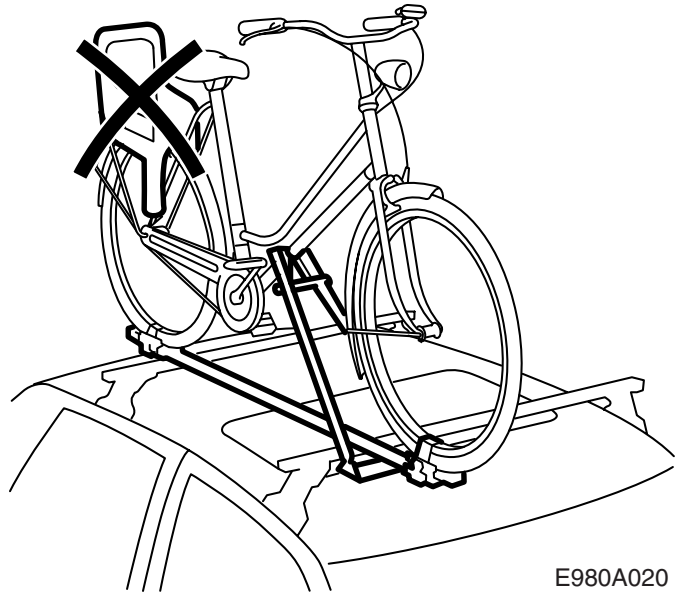

E980A020

5 Secure the bike wheels in the wheel plates. Place the straps over the wheels rims and attach in the recess on the underside.

**Transport mode without a bike**

Lower the bracket and secure it with screws in the square bar with the handle. Lock with the turn catch.

**Important**

Child seats must not be attached during transport.  
Maximum transport speed **120 km/h**.