





**SAAB**

**MONTERINGSANVISNING · INSTALLATION INSTRUCTIONS  
MONTAGEANLEITUNG · INSTALLATIONS DE MONTAGE**

## Saab 900 M94-, Saab 9-3


Bright-polished sill scuff plate

Accessories Part No.	Group	Date	Instruction Part No.	Replaces
400 105 524 400 105 532	9:55-01	Sep 98	46 73 497	46 73 497 Jan 95

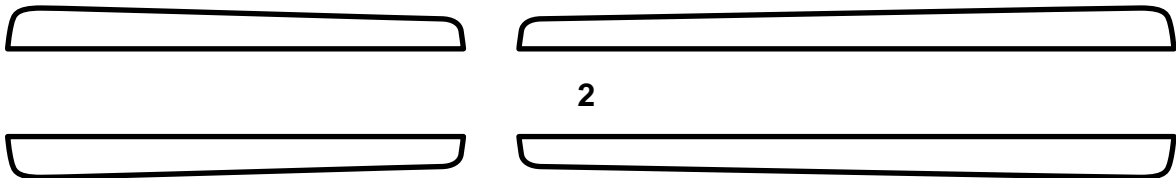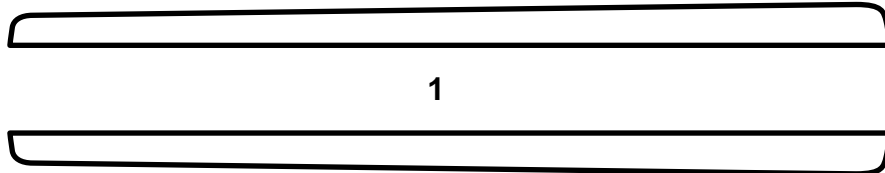

D980A084

- 1 Sill scuff plate, 3D/CV
- 2 Sill scuff plate, 5D

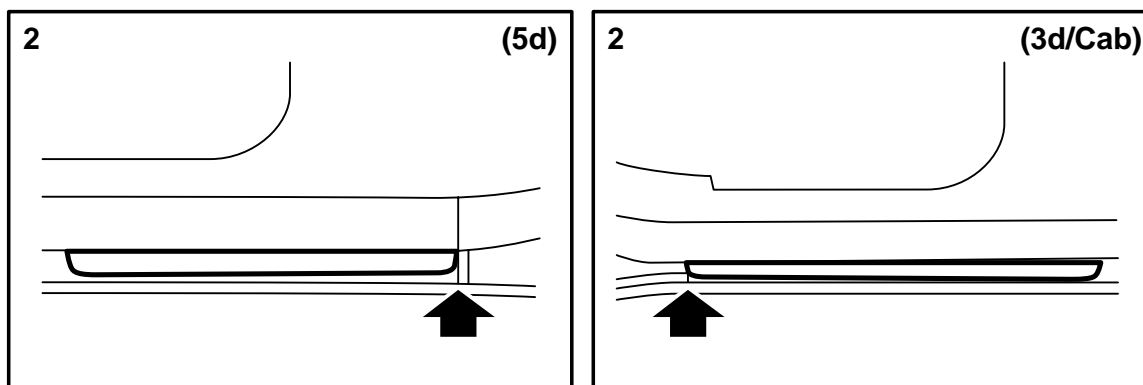

D980A085

- 1 Wash the mating surfaces clean from dust and grease.
- 2 **5D:** Fasten a piece of adhesive tape from the front edge of the inner scuff plate and out over the sill to mark the front fixing point for the bright-polished scuff plate.  
**3D/CV:** Use the rear welded joint as a fixing point.
- 3 Fit the bright-polished scuff plate edge-to-edge with the end of the radius, see illustration.

### Important

The wide section of the scuff plate must be fitted towards the front on the front sills and towards the rear on the rear sills (5D).

If it is necessary, the bright-polished scuff plate can be adjusted by heating it carefully with a hot-air gun.

- 4 Press in place the scuff plates using a clean cloth.
- 5 Place the installation instructions in the glove box.